

# Impedance Analyzer

## 6632

### Features

- Frequency range: DC, 10Hz to 1/3/5/10/20/30MHz/50MHz
- Basic accuracy up to  $\pm 0.08\%$  (typical  $\pm 0.05\%$ )
- Automatic Level Control (ALC)
- Output impedance  $25\Omega/100\Omega$ , switchable
- Using with DC bias current test system
- Support meter mode and list mode, sweep mode, and equivalent circuit analysis (option) function
- Built-in DC Bias voltage  $\pm 12V$
- Measurement of piezoelectric element admittance circle, and can measure DC bias characteristic of capacitance value.
- Ultra-high measuring speed < 3ms
- Open circuit/short circuit/load correction function
- Up to four parameters can be selected in the electric meter mode. The inductance and DCR values can be measured and displayed simultaneously
- Auto component classification: Comparator function and Handler BIN classification function
- Can be used with various fixtures, such as: liquid dielectric material test fixture, dielectric material test fixture and magnetic material test fixture.....etc.
- Support RS-232, GPIB, Handler, LAN, USB Host/Device interfaces
- Using in R & D department, process development and laboratory
- PC connection data analysis software is available



CE RS-232 Handler USB Host/Device GPIB LAN

### Accessories/Fixtures

#### Standard Accessories

- Power Cord
- DIP Test Fixture (FX-000C19)



#### Optional Accessories

- PC Link software

	<b>F423906A</b> Kelvin Clip Leads (with BNC Box)		<b>F423503</b> DIP Test Fixture		<b>F423504</b> DIP Test Fixture
	<b>FX-0000C6</b> DIP Test Fixture		<b>F423905</b> SMD Test Fixture		<b>FX-000C10</b> Bottom Electrode SMD Test Fixture
	<b>FX-000C11</b> SMD Tweezer Test Leads		<b>FX-000C12</b> SMD Test Fixture		<b>FX-0000C7</b> Dielectric Material Test Fixture
	<b>FX-0000C8</b> Magnetic Material Test Fixture		<b>F663001 A/B/C BNC Test Leads</b>		<b>F420001</b> External Voltage Bias( $\pm 200V/1MHz$ )
	<b>FX-0000C9</b> Material Testing Fixture		<b>FX-000C20</b> Liquid Dielectric Material Test Fixture		<b>F420003</b> External Voltage Bias ( $\pm 40V/1MHz$ )
	<b>F420005</b> External Voltage/ Current Bias ( $\pm 40V/100mA$ )		<b>F420006</b> External Voltage Bias ( $\pm 2000V/1MHz$ )		<b>FX-LR0001</b> Automatic Level Compensation Fixture

### Applications

Passive Components: Capacitor, Inductor, Resistor, Transformer, Ceramic resonator, Quartz Crystal

Semiconductor Components: The CV characteristics analysis of varactor diodes, Diodes

Dielectric Material: Estimation on permittivity and consumption tangent of plastic, ceramic and PCB

Other Components: Estimation of the impedance of PCB components

## Specifications | S model is an optional equivalent circuit analysis function


Model Name	6632-1/1S	6632-3/3S	6632-5/5S	6632-10/10S	6632-20/20S	6632-30/30S	6632-50/50S	
Test Frequency	10Hz-1MHz	10Hz-3MHz	10Hz-5MHz	10Hz-10MHz	10Hz-20MHz	10Hz-30MHz	10Hz-50MHz	
Frequency Resolution	100mHz, 6 digits of setting							
Frequency Output Accuracy	$\pm 0.01\%$							
Basic Accuracy	$\pm 0.08\%$ (typical $\pm 0.05\%$ )							
AC Drive Level	Voltage Minimum Resolution			1mV				
	Accuracy			ALC OFF: 10% of setting $\pm 2\text{mV}$				
	Test Signal Current Level			ALC ON: 6% of setting $\pm 2\text{mV}$				
	Current Minimum Resolution			200 $\mu\text{A}$ -20mAmps				
	Accuracy			10 $\mu\text{A}$				
DC Drive Level	ALC OFF: 10% of setting $\pm 20\mu\text{A}$							
Output Impedance	ALC ON: 6% of setting $\pm 20\mu\text{A}$							
Test Time (Fastest)	<3ms							
Measurement Parameters and Ranges	Z	0.000m $\Omega$ -9999.99M $\Omega$						
	R, X	$\pm 0.000\text{m}\Omega$ -9999.99M $\Omega$						
	Y	0.00000 $\mu\text{S}$ -999.999k $\text{S}$						
	G, B	$\pm 0.00000\mu\text{S}$ -999.999k $\text{S}$						
	$\theta$ RAD	$\pm 0.00000$ -3.14159						
	$\theta$ DEG	$\pm 0.000^\circ$ -180.000°						
	Cs, Cp	$\pm 0.00000\text{pF}$ -9999.99F						
	Ls, Lp	$\pm 0.00\text{nH}$ -9999.99k $\text{H}$						
	D	0.00000-9999.99						
	Q	0.00-9999.99						
	$\Delta$	$\pm 0.00\%$ -9999.99%						
	Rdc	0.00m $\Omega$ -99.9999M $\Omega$						
	$\epsilon'$ $\epsilon''$	0-100000						
	$\mu'$ $\mu''$	0-100000						
Bias Current Source (option)	DC Bias 6243/ 6240(320A), 6223/ 6220(120A), 6210(60A)							

## General

Measurement Mode	Meter mode, list mode, sweep mode				
Measurement Circuit	Series/Parallel				
Correction	Open Circuit/Short Circuit/Load correction				
Cable Compensation	0/ 0.5/ 1/ 2 m				
List Mode	50 groups of Multi-steps setting (Each group contains up to 15 steps)				
Built-in DC Bias	-12 to +12V, 0.3% $\pm 1.5\text{mV}$ , 100Hz to 50MHz				
Bin sort	9 BINs				
Comparator	ABS, $\Delta$ ABS, $\Delta\%$ , OFF				
Built-in Storage	100 sets LCR setting documents, 50 groups of list mode setting				
USB Host Storage	LCR setting documents, list mode setting document, BMP graphics, Sweep screen and test result data				
Trigger Test	Auto, manual, RS-232, GPIB, Handler				
Interface	RS-232, GPIB, Handler, LAN, USB Host/Device				
Option	PC link software				
	Equivalent Circuit Analysis	Three elements (4 models), four elements (3 models)			
Power Supply	Voltage 100-240Vac				
	Frequency 50-60Hz				
	Low power consumption: Maximum 30W				
Display	7.0" TFT, 800×480 color screen				
Environment	Temperature: 10-40°C, Humidity: 20-80%RH				
Dimension (W*H*D)	336×147×340mm				
Weight	3.95kg				


# 6632 Key Features

## A Function Introduction

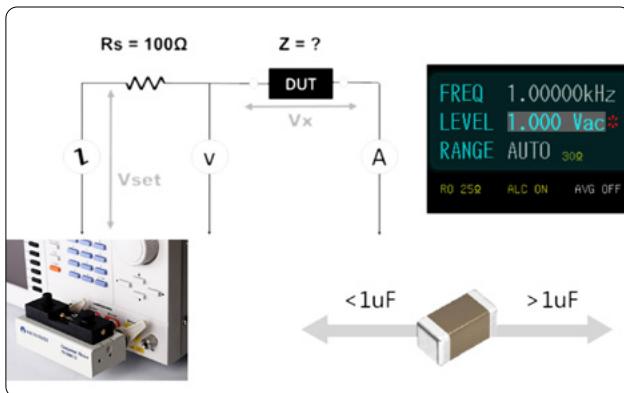

### Output Impedance 25Ω/100Ω and Auto Level Control (ALC)

The key parameters for capacitance are Cs/Cp/D/Q/ESR/DC Bias Voltage.

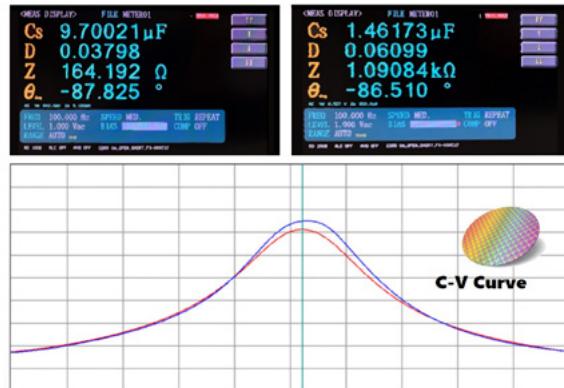

### Evaluation of DC bias voltage characteristics with semiconductor wafer or ceramic multilayer capacitors

Multi-layer ceramic capacitors (MLCC) DC Bias measuring value from 9.7uF decrease to 1.46uF.





### Liquid Dielectric Material Test Fixture (C20) /Dielectric Material Test Fixture (C7)

Using C20 for measuring the characteristics of electrochemical materials and using C7 or measuring PCB board or ceramic board.



### Magnetic Material Test Fixture (FX-0000C8)

Using the magnetic material test fixture for measuring of permeability of various toroidal cores or ferrite cores and electromagnetic shielding coating materials, 6630 built-in formula to directly calculate the permeability coefficient value  $\mu'r'$ ,  $\mu'r''$ .

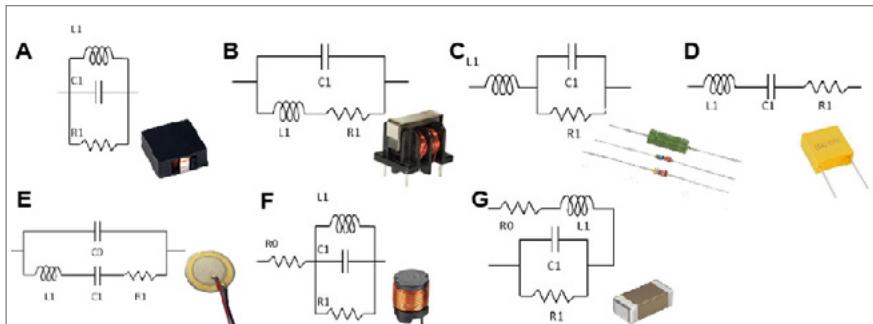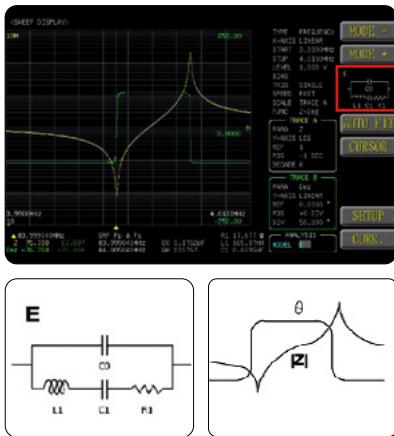

### Equivalent Circuit Analysis

It has seven different models, combine with different types of parameters (R, L, C), you can see three or four elements value, and self-resonant frequency (SRF). You can simulate the impedance trace of your own equivalent circuit parameter values and then compare it with an accrual measurement trace.



#### Piezoelectric element/quartz crystal analysis frequency characteristics

The key parameters for Piezoelectric element /quartz crystal are Fs/Fp/Qm/Kp (Electromechanical coupling coefficient)



#### Evaluation impedance characteristics of RFID/ NFC/automotive wireless of antennas

Using 6632 impedance analyzer equivalent circuit Analysis function.



#### Testing PC board inductance coil

The key parameters for 6632 impedance analyzer measuring PC board inductance coil are L/Q/DCR/Rs/SRF.

## B Applications


### Passive Component



### Acoustic Components



### Material

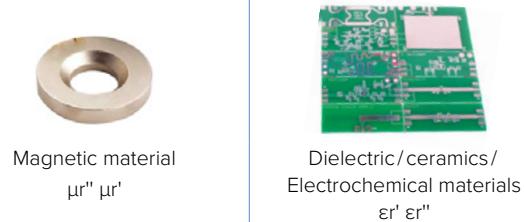

### Wireless RF/Power Supply



### Semiconductor Components

