

Automatic Transformer Test System

9560

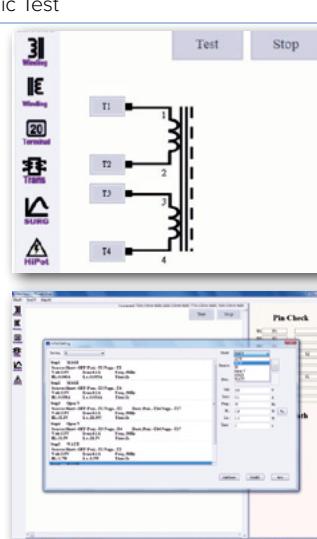
Features

- One-step integration for transformers HV and LV electrical tests
- 20 test channels
- AC Source 4 channels input
- Using 4-wire measuring method (up to 10 different windings)
- Electrical safety - Withstand Voltage AC 5000V
- Electrical safety - Withstand Voltage DC 6000V
- Electrical safety - Insulation 12000MΩ max
- Integrating impulse winding test function
- Magnetizing current (2mA - 4.2A)
- Open circuit voltage (10mV -500V)
- No-load power consumption (0.2-500VA)
- Support 100mA DC bias (F7721)



Applications

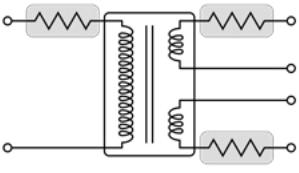
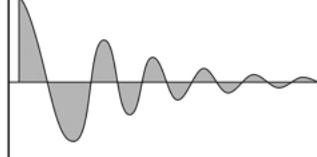
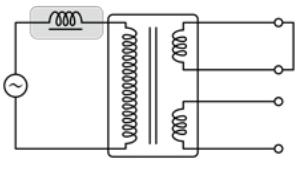
SMPS transformers, Power transformers, Communication transformers, EMC filters, Magnetic components such as toroidal coils

| Application | Dynamic Test |
|-------------------|---|
| SMPS transformers |   |

General specifications

| Compact cabinet | |
|-----------------------|--|
| Storage | Files can be stored in PC via RS-232 or USB |
| Power supply required | Voltage 90Vac-125Vac or 190Vac-250Vac Frequency 47-63Hz |
| Power consumption | 1000VA |
| Dimensions | 600*1020*1555mm (W*H*D) |
| Weight | 190kg |

| Desktop | | | |
|------------------------------|--|--|--|
| Units included in the system | Transformer Tester 6265/6266/6267 | Hi-Pot Tester 7605 | Impulse Winding Tester 7703 |
| Interface | RS-232 Handler LAN USB Host EXT.I/O | RS-232 Remote USB Host USB Device EXT.I/O | RS-232 Remote Printer |
| Power supply required | Voltage 90Vac-125Vac or 190Vac-250Vac Frequency 47Hz-63Hz | Voltage 90Vac-264Vac Frequency 50/60Hz±5% | Voltage 115/230Vac±15% Frequency 50/60Hz±5% |
| LCD display | 7" TFT, color display (800*480) | 4.3" TFT, color display (480*272) | 5.7" TFT, monochrome (320*240) |
| Dimensions of unit | 435×145×522 mm | 365×145×430 mm | 435×190×522 mm |
| Weight of unit | 9Kg | 14Kg | 14Kg |

| | | | | |
|--|-------|---|--|---|
| DC bias test | F7721 |  | Using the LCR measurement technique |  |
| Perform transformer safety and life tests | |  | Perform transformer open circuit test |  |

Measurement specification

| 9560 Automatic Transformer Test System for transformers | | | | | | |
|---|--------------------------------|--|-----------|--|--|--|
| Transformer tester | 6265 | 6266 | 6267 | | | |
| Test frequency | 10Hz-200kHz | 10Hz-500kHz | 10Hz-1MHz | | | |
| Test channels | 20 | | | | | |
| Dynamic test items | | | | | | |
| Magnetizing current, open-circuit voltage, no-load power consumption | | | | | | |
| Low voltage electrical measurement parameters | | | | | | |
| Inductance, impedance, capacitance, reactance, conductance, susceptance, admittance, AC resistance, DC resistance, quality factor, loss factor, phase angle, leakage inductance, turns ratio, balance, determination of pin short circuit, the DC Bias inductance | | | | | | |
| High voltage electrical measurement parameters | | | | | | |
| Leakage current, insulation resistance, impulse winding test (impulse waveform analysis and comparison) | | | | | | |
| Specifications for dynamic test | | | | | | |
| Magnetizing current | 2mA-4.2A | Test frequency : 45Hz-500Hz Test voltage : 0V-310.0Vrms | | | | |
| Open circuit voltage | 10Mv-500V | | | | | |
| No-load power consumption | 0.2-500VA (External AC Source) | | | | | |
| LV electrical specifications | | | | | | |
| L, LK | 0. 1nH ~ 9999.99H | | | | | |
| C | 0.00001pF ~ 999.99mF | | | | | |
| Q,D | 0.00001 ~ 99999 | | | | | |
| Z,X,R | 0.00001Ω ~ 99.9999MΩ | | | | | |
| Y | 0.01nS ~ 99.9999S | | | | | |
| θ | -180°~ +180° | | | | | |
| DCR | 0.01mΩ ~ 99.999MΩ | | | | | |
| Turn Ratio | 0.01 ~ 99999.99turns | | | | | |
| Pin-Short | 12 pairs, between pin to pin | | | | | |

| HV electrical specifications | |
|---|---|
| AC output voltage | 10V-5000V |
| AC voltage resolution | 1V |
| AC voltage accuracy | ±(3% of setting +5V) |
| AC leakage current range | 0.001-31mA |
| AC leakage current accuracy | ±(3% of reading +10uA) |
| AC leakage current resolution | 0.001mA |
| AC maximum rated current | 30mA |
| AC arc detection | 1-20 |
| DC output voltage | 10V-6000V |
| DC voltage resolution | 1V |
| DC voltage accuracy | ±(3% of setting +5V) |
| DC leakage current range | 0.001-11mA |
| DC leakage current accuracy | ±(3% of reading +10uA) |
| DC leakage current resolution | 0.001mA |
| DC maximum rated current | 10mA |
| DC arc detection | 1-10 |
| Insulation resistance output voltage | 10V-1000V |
| Voltage resolution | 1V |
| Voltage accuracy | ±(3% of setting +5V) |
| Insulation resistance range | 1-12000MΩ |
| Test time | 0.1-999s |
| AC ramp time | 0.1-10s |
| DC ramp time | 0.1-10s |
| Specifications for impulse winding test | |
| Programmable pulse voltage | 200V-5000V |
| Comparison modes | Total area comparison, area differential area comparison, waveform comparison, number of flutters, number of coronas, high-frequency harmonic analysis, high-frequency noise analysis |